



圆弧型・肋槽型

其余 6/3

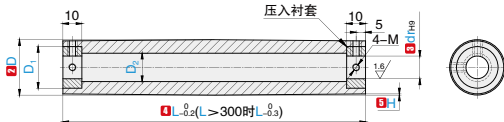

圆弧型
BFD BC

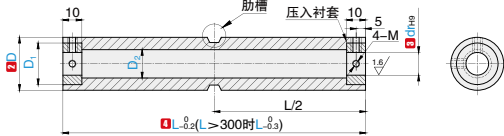

肋槽型
BFD BR

K: 新 JIS (B1301) 键槽尺寸表。

公称型号	d _{ref}	b _{JIS}	t
K8	8	3	1.4
K10	10	3	1.4
S10	10	4	1.8
K12	12	4	1.8
K15	15	5	2.3
K20	20	6	2.8
K30	30	8	3.3
K40	40	12	3.3


③轴孔dr规格

圆孔+螺紋孔 新JIS键槽+螺紋孔



注: S种类仅为dr=10情况下可选

键槽形状



订购编号示例

1 代号 - 2 D - 3 dr 轴孔规格 - 4 L - 5 H - 6 X - 7 Y - 8 Z - 9 材料代码
BFD BC - 40 - K15 - 310 - H0.8 - - - E
BFD BR - 60 - C30 - 450 - - X12 - Y4.6 - Z10 - C

1 代号	2 D	3 dr 轴孔规格		4 L 指定单位 10mm	5 H (圆弧型时选择)		主要尺寸 肋槽型肋槽尺寸 指定单位 0.1mm			E (键槽 长度)	D ₁	D ₂			M (粗牙)	
		C (圆孔 + 螺紋孔)	K-S (仅 10) (键 槽 + 螺紋孔)		110 ≤ L ≤ 300	310 ≤ L ≤ 500	6 X	7 Y	8 Z			铝合金	碳钢	SS304	C (圆孔 + 螺紋孔)	K-S (仅 10) (键 槽 + 螺紋孔)
BFD BC BFD BR	30	C8	K8	110 ~ 500	0.3 0.5 0.8	0.5 0.8 1.0 1.2	7.0 ~ 15.0	2.0 ~ 4.5	5.0 ~ 12.0	25 30 25 30 33 17 22 27 22 45 32 55	22	15	15.8	18	M4	M3
		C10	K10-S10													
		C12	K12													
	35	C10	K10								27	17	18.1	18	M4	M3
		C12	K12													
		C15	K15													
	40	C12	K12								33	17	18.7	20	M4	M3 M4 M5
		C15	K15													
		C20	K20													
	50	C15	K15								40	22	30	28	M5	M4 M5 M6
		C20	K20													
		C25	K25													
	60	C20	K20								45	32	-	-	M6	M5 M6
		C25	K25													
		C30	K30													
	80	C25	K25								55	41	-	-	M8	M6 M8
		C30	K30													
		C35	K35													

▲ D = 60・80 仅适用于铝合金材质。

▲ D = 30・35 的肋槽型仅适用于铝合金材质。

▲ D 选购键槽孔 + 螺紋孔的轴孔直径 10、键槽宽 4.0mm (高 1.8mm) 的规格时, 请指定 S10。

代号	类型	9 材料代码	材质	表面处理
BFD BC BFD BR	圆弧型	C	铝合金	本色阳极氧化
	肋槽型	E	碳钢	无电解镀锌
		D	SS304	-