


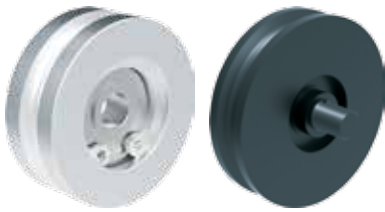


加宽型



注：轴承为压入式，不可拆卸
外螺纹部销铆接。

标准型
BRSWN



其余

外螺纹型
BRSWE

订购编号示例

1 代号 - 2 D - 3 R - 4 材料代码 - 5 追加工代码
BRSWN - 30 - 1 - F
BRSWE - 48 - 2 - K - DS

1 代号	主要尺寸															适用圆皮带直径
	2 D	3 R	dr	D ₁	D ₂	D ₃	D ₄	T	E	F	轴承公称型号	B	Q	S	M (粗牙)	
BRSWN BRSWE	▲15	1	3	10	13	17	8	10	5	6.5	623-2Z	-	-	-	-	2
	▲20		5	16	18	22	13	12	6	7.5	625-2Z	-	-	-	-	2
	▲30		5	16	28	32	13	12	6	9	625-2Z	-	-	-	-	2
	▲20	1.5	4	13	17	22	11	10	6	7.5	624-2Z	-	-	-	-	3
	▲30		6	19	27	32	16	12	7	9	626-2Z	1	8	3	M6	3
	▲23		5	16	19	25	13	10	6	7.5	625-2Z	-	-	-	-	3
	28	2	6	19	24	30	16	12	7	9	626-2Z	1	8	3	M6	4
	30		6	19	26	32	16	12	7	9	626-2Z	1	8	3	M6	4
	40		10	26	36	42	23	15	9.2	11.5	6000-2Z	1.5	10	5	M8	4
	48		12	28	44	50	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	4
	60		12	28	56	62	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	4
	▲23		5	16	18	25	13	10	6	7.5	625-2Z	-	-	-	-	5
	28	2.5	6	19	23	30	16	12	7	9	626-2Z	1	8	3	M6	5
	40		10	26	35	42	23	15	9.2	11.5	6000-2Z	1.5	10	5	M8	5
	48		12	28	43	50	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	5
	50		12	28	45	52	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	5
	60		12	28	55	62	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	5
	28	3	6	19	22	30	16	12	7	9	626-2Z	1	8	3	M6	6
	38		10	26	32	40	23	15	9.2	11.5	6000-2Z	1.5	10	5	M8	6
	48		12	28	42	50	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	6
	50		12	28	44	52	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	6
	60		12	28	54	62	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	6
	80		12	28	74	82	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	6
	100	4	12	28	94	102	28	16	10.2	12.5	6001-2Z	1.5	12	6	M10	8
	50		12	28	42	52	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	8
	60		12	28	52	62	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	8
	80		12	28	72	82	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	8
	100		12	28	92	102	28	16	10.2	12.5	6002-2Z	1	12	6	M10	8
	120		15	32	112	122	28	16	10.2	12.5	6002-2Z	1	12	6	M10	8
	60	5	12	28	50	62	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	10
	80		12	28	70	82	25	15	9.2	11.5	6001-2Z	1.5	12	6	M10	10
	100		12	28	90	102	28	16	10.2	12.5	6002-2Z	1	12	6	M10	10
	120		15	32	110	122	28	16	10.2	12.5	6002-2Z	1	12	6	M10	10
	140		15	32	130	142	28	16	10.2	12.5	6002-2Z	1	12	6	M10	10
	140		15	32	130	142	28	16	10.2	12.5	6002-2Z	1	12	6	M10	10

▲仅标准型适用。

代号	类型	材料代码	材质	表面处理	轴承材质	附件	
BRSWN	标准型	F	45#	四氧化三铁保护膜	钢	弹性挡圈 (SS304)	
		G	45#	无电解镀锌			
		H	铝合金	本色阳极氧化			
		K	SS304	—	不锈钢		
BRSWE	外螺纹型	F	45#	四氧化三铁保护膜	钢		
		G	45#	无电解镀锌			
		J	SS304	—			
		K	SS304	—			