


惰轮销

■ 产品特点：惰轮安装用配套组件。

链轮链条

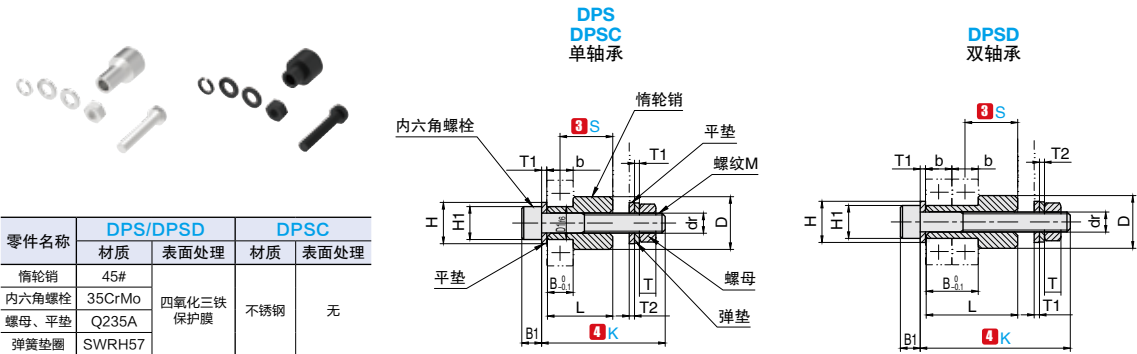

订购编号示例		1 代号	2 尺寸系列	- 3 S	- 4 K
			DPS6000	- S14	- K40
			DPSD6201	- S20	- K55

1 代号	2 轴承尺寸系列	3 S	4 K 指定单位 5mm	适用 轴承	惰轮销主要尺寸					螺栓、垫圈主要尺寸							最大 容许负载 N																				
					L	B	D	D1	dr	M	B1	H	H1	T	T1	T2																					
DPS/DPSC	6000	12	30 ~ 40	6000ZZ (b = 8)	A + 3.8	7.8	16	10	6.2	M6	6	12.5	10	5	1.6	1.5	323 (33)																				
		14 16	35 ~ 45																																		
		18 20	40 ~ 50																																		
DPSD		12 14	40 ~ 50																																		
	16 18	45 ~ 55	A + 11.8		15.8	16	12	8.2	M8	8	17	13	6.5	1.6	2	441																					
	20	50 ~ 60																																			
DPS/DPSC	6001	14	35 ~ 45	6001ZZ (b = 8)	A + 3.8											7.8	16	12	8.2	M8	8	17	13	6.5	1.6	2	548 (56)										
		16 18 20	40 ~ 50																																		
		22	45 ~ 55		A + 11.8	15.8	16	12	8.2	M8	8	17	13	6.5	1.6	2											441										
DPSD		14 16	45 ~ 55																																		
	18 20 22	50 ~ 60	6201ZZ (b = 10)		A + 4.8	9.8											16	12	8.2	M8	8	17	13	6.5	1.6	2	548 (56)										
DPS/DPSC	14	35 ~ 45																																			
	16 18	40 ~ 50		A + 14.8	19.8	16	12	8.2	M8	8	17	13	6.5	1.6	2	441																					
	20 22	45 ~ 55																																			
DPSD	14	45 ~ 55		6202ZZ (b = 11)	A + 5.3											10.8	20	15	10.5	M10	10	21	16	8	2	2.5	999 (102)										
	16 18 20	45 ~ 55																																			
	22 24	50 ~ 60	A + 16.3		21.8	20	15	10.5	M10	10	21	16	8	2	2.5	803																					
DPSD	16 18	55 ~ 65																																			
	20 22	60 ~ 70	6203ZZ (b = 12)		A + 5.8											11.8	25	17	10.5	M10	10	21	16	8	2	2.5	1244 (127)										
	24	65 ~ 75																																			
DPS/DPSC	6203	16 18		45 ~ 55	6204ZZ (b = 14)	A + 6.8	13.8	25	20	14.5	M14	14	28	21	11	2.5											3.5	1989 (203)									
		20 22 24		50 ~ 60																									A + 20.8	27.8	25	20	14.5	M14	14	28	21
DPSD		16		55 ~ 65																																	
		18 20 22		60 ~ 70		A + 20.8	27.8										25	20	14.5	M14	14	28	21	11	2.5	3.5		1617									
	24	65 ~ 75																																			
DPS/DPSC	6204	20 22	55 ~ 65	6204ZZ (b = 14)				A + 6.8	13.8	25	20	14.5	M14	14	28	21											11	2.5	3.5	1989 (203)							
		24 26	60 ~ 70		A + 20.8																										27.8	25	20	14.5	M14	14	28
		28 30	65 ~ 75			A + 20.8	27.8	25	20								14.5	M14	14	28	21	11	2.5	3.5	1617												
DPSD		20 22	70 ~ 80																																		
	24 26 28	75 ~ 85	A + 20.8		27.8	25	20			14.5	M14	14	28	21	11	2.5									3.5	1617											
	30	80 ~ 90																																			

▲ 作用于惰轮的负载不可超过容许最大负载，括号内为不锈钢材质的最大容许负载。

▲ 请勿用于冲击负载或链条正反转等场合。

▲ 负载较大时，请用悬臂销。