


无挡圈单轴承型

产品特点：无挡圈，最适合向轴承施加预压的场合。

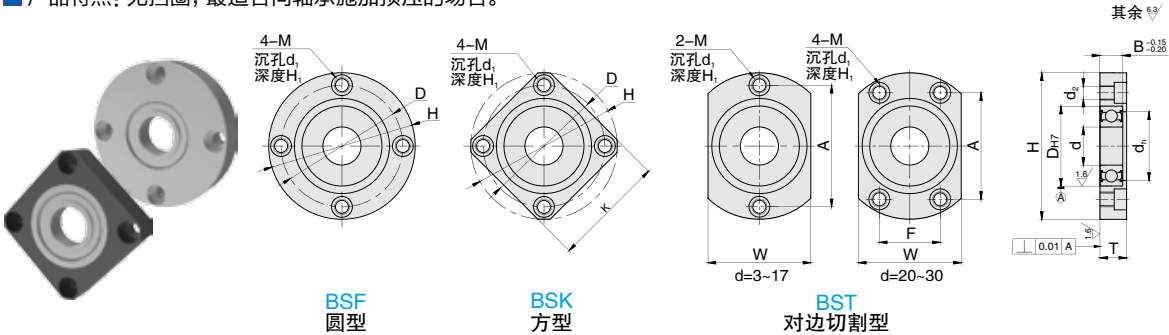

▲ 对安装孔进行螺纹及沉孔加工，以便能从正反两面进行安装。
▲ B 尺寸为负公差，因此轴承可能有 0.1~0.2 的凸出。

订购编号示例				1 代号	2 轴承型号	3 材料代码
				BSF	6800-2Z	A

1 代号	2 轴承型号	d	D _{H7}	H	B	T	d _s	D	K	A	W	F	d ₁	H ₁	M (粗牙螺纹) (d ₂)	材料规格有无					
																轴承: 铜 固定座: 45#	轴承: 铜 固定座: A2017	轴承: 不锈钢			
BSF BSK BST	623-2Z	3	10	33	4	6	7	24	27	24	16	-	6.5	3.4	M4 (3.3)			-			
	624-2Z	4	13	35	5	7	9	26	28	26	18		8	4.4	M5 (4.3)			-			
	605-2Z	5	14	36	5	7	10	26	30	26	20							-			
	625-2Z		16	38	5	7	12	28	31	28	22							-			
	606-2Z	6	17	39	6	8	13	29	32	29	23							-			
	626-2Z		19	41	6	8	15	31	34	31	25							-			
	67/8-2Z	8	12	34	3.5	6	10	25	27	25	18		6.5	3.4	M4(3.3)			-			
	69/8-2Z		19	41	6	8	15	31	34	31	25							-			
	608-2Z		22	45	7	9	18	35	36	35	29							-			
	628-2Z		24	47	8	10	20	37	37	37	32							-			
	6700-2Z	10	15	37	4	7.5	12	27	30	27	22		-	8	4.4	M5 (4.3)			-		
	6800-2Z		19	41	5	7.5	15	31	34	31	25								-		
	6900-2Z		22	45	6	8	19	35	36	35	29								-		
	6000-2Z		26	50	8	10	22	40	39	40	34								-		
	6200-2Z	30	54	9	11	24	44	42	44	38								-			
	6701-2Z	18	40	4	7.5	15	30	31	30	25								-			
	6801-2Z	21	44	5	7.5	17	34	35	34	29								-			
	6901-2Z	24	48	6	8	21	38	38	38	31								-			
	6001-2Z	28	52	8	10	24	42	40	42	36					-						
	6201-2Z	32	56	10	12	26	46	43	46	40					-						
	6702-2Z	21	44	4	7.5	18	34	35	34	29					-						
	6802-2Z	24	47	5	7.5	20	37	37	37	32					-						
	6902-2Z	28	57	7	9	25	45	45	45	37				-							
	6002-2Z	32	60	9	11	28	48	46	48	40				-							
	6202-2Z	35	64	11	13	29	52	49	52	44				-							
	6803-2Z	26	50	5	7.5	22	40	39	40	34				-							
	6903-2Z	30	60	7	9	27	48	46	48	38				-							
	6003-2Z	35	66	10	12	31	54	50	54	44				-							
	6203-2Z	40	72	12	14	34	60	54	60	50				-							
	6704-2Z	27	51	4	7.5	23	41	39	32	35	25		8	4.4	M5 (4.3)			-			
	6804-2Z	32	60	7	9	28	48	46	38	40	29		9.5	5.4	M6 (5.2)			-			
	6904-2Z	37	69	9	11	34	56	54	51	47	24		11	6.5	M8 (6.8)			-			
	6004-2Z	42	77	12	14	36	64	59	56	54	32							-			
	6204-2Z	47	81	14	16	40	68	62	59	58	34							-			
	6805-2Z	37	69	7	11	34	56	54	51	47	24							-			
	6905-2Z	42	77	9	11	36	64	59	56	54	32							-			
	6005-2Z	47	88	12	14	41	72	67	63	58	36		14	8.6	M10 (8.5)			-			
	6205-2Z	52	94	15	17	45	78	72	68	64	39							-			
	6806-2Z	42	77	7	11	36	64	59	56	54	32					11	6.5	M8 (6.8)			-
	6906-2Z	47	88	9	13	41	72	67	63	58	36							-			
	6006-2Z	55	96	13	15	48	80	73	70	66	40		14	8.6	M10 (8.5)			-			
	6206-2Z	62	104	16	18	55	88	79	77	74	44							-			

材料说明

代号	类型	3 材料代码	材质		表面处理
			轴承	固定座	固定座
BSF BSK BST	圆型 方型 对边切割型	A	钢	45#	四氧化三铁保护膜
		B		45#	无电解镍
		C		A2017	本色阳极氧化处理
		E	不锈钢	A2017	本色阳极氧化处理
		F		0Cr18Ni9	-

▲ 代号 BSK 无材料代码为 E 的材质。