


单列型・双列组合型（普通级）

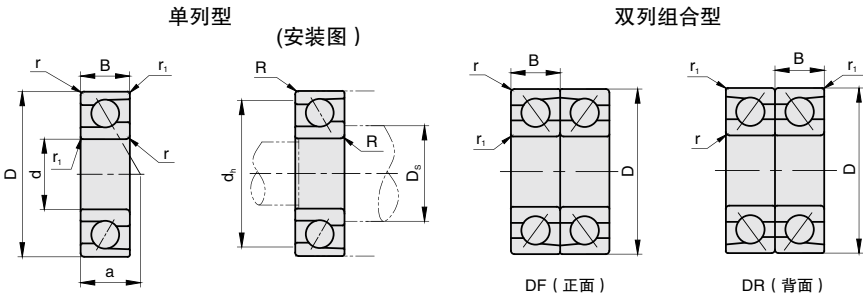

订购编号示例 1 代号 - 2 组合型式

RS7003 - DF

RD7205

单列型

1 代号	d	D	B	r(min.)	r _i (min.)	基本额定负载		许用转速 rpm (参考)	作用点 a	安装尺寸			重量 g (参考)
						Cr (动) KN	Cor (静) KN			D _s (min.)	d _h (max.)	R (max.)	
RS7000	10	26	8	0.3	0.15	5.35	2.6	23200	9.2	12.5	23.5	0.3	23
RS7200		30	9	0.6	0.3	5.4	2.71	22400	10.3	15	25	0.6	29
RS7001	12	28	8	0.3	0.15	5.8	2.98	20800	9.8	14.5	25.5	0.3	25
RS7201		32	10	0.6	0.3	8	4.05	20000	11.4	17	27	0.6	37
RS7002	15	32	9	0.3	0.15	6.1	3.45	18400	11.3	17.5	29.5	0.3	35
RS7202		35	11	0.6	0.3	8.65	4.65	17600	12.7	20	30	0.6	46
RS7003	17	35	10	0.3	0.15	6.4	3.8	16800	12.5	19.5	32.5	0.3	46
RS7203		40	12	0.6	0.3	10.8	6	15200	14.2	22	35	0.6	67
RS7004	20	42	12	0.6	0.3	10.8	6.6	14400	14.9	25	37	0.6	80
RS7204		47	14	1	0.6	14.5	8.3	13600	16.7	26	41	1	109
RS7005	25	47	12	0.6	0.3	11.3	7.4	12800	16.4	30	42	0.6	93
RS7205		52	15	1	0.6	16.2	10.3	11200	18.6	31	46	1	130
RS7006	30	55	13	1	0.6	14.5	10.1	10400	18.8	36	49	1	135
RS7206		62	16	1	0.6	22.5	14.8	9600	21.3	36	56	1	197

两列组合型

1 代号	2 组合型式	d	D	B	r(min.)	r _i (min.)	基本额定负载		许用转速 rpm (参考)	作用点 a		安装尺寸						重量 g (参考)
							Cr(动) KN	Cor(静) KN				DF			DR			
												D _s (min.)	d _h (max.)	R (max.)	D _s (min.)	d _h (max.)	R (max.)	
RD7000	DF (正面)	10	26	8	0.3	0.15	8.75	5.2	18400	18.4	2.4	12.5	24.8	0.3	11.2	23.5	0.15	46
RD7200			30	9	0.6	0.3	8.8	5.4	17600	20.5	2.5	15	27.5	0.6	12.5	25	0.3	58
RD7001		12	28	8	0.3	0.15	9.4	5.95	16800	19.5	3.5	14.5	26.8	0.3	13.2	25.5	0.15	50
RD7201			32	10	0.6	0.3	13	8.05	16000	22.7	2.7	17	29.5	0.6	14.5	27	0.3	74
RD7002		15	32	9	0.3	0.15	9.95	6.85	14400	22.6	4.6	17.5	30.8	0.3	16.2	29.5	0.15	70
RD7202			35	11	0.6	0.3	14	9.3	13600	25.4	3.4	20	32.5	0.6	17.5	30	0.3	92
RD7003		17	35	10	0.3	0.15	10.4	7.65	13600	25	5	19.5	33.8	0.3	18.2	32.5	0.15	92
RD7203			40	12	0.6	0.3	17.6	12	12000	28.5	4.5	22	37.5	0.6	19.5	35	0.3	134
RD7004		20	42	12	0.6	0.3	17.6	13.2	12000	29.9	5.9	25	39.5	0.6	22.5	37	0.3	160
RD7204			47	14	1	0.6	23.5	16.6	10400	33.3	5.3	26	42	1	25	41	0.6	218
RD7005		25	47	12	0.6	0.3	18.3	14.8	9600	32.8	8.8	30	44.5	0.6	27.5	42	0.3	186
RD7205			52	15	1	0.6	26.3	20.5	8800	37.2	7.2	31	47	1	30	46	0.6	260
RD7006	30	55	13	1	0.6	23.6	20.2	8800	37.5	11.5	6	50	1	35	49	0.6	270	
RD7206		62	16	1	0.6	36.5	29.5	7840	42.6	10.6	36	57	1	35	56	0.6	394	
RD7207	DR (背面)	35	72	17	1.1	0.6	48.5	40	6800	47.9	-	42	67	1	-	-	-	574
RD7208		40	80	18	1.1	0.6	57.5	50.5	6000	52.6	-	47	75	1	-	-	-	750
RD7209		45	85	19	1.1	0.6	64.5	57.5	5520	56.5	-	52	80	1	-	-	-	822

▲ 出厂时未封入润滑脂。请在使用前封入润滑脂。
▲ 以上几款为接触角度 30°。

材料说明

代号	类型	材质
RS7 □ RD7 □	单列型 两列组合型	GCr15