


铜合金平头螺栓孔型 / 短头螺栓孔型

产品特点：能承受轴向负载的垫片。



代号	类型	材质	硬度 HB	使用温度范围 (℃)
OFAWZ	平头螺栓孔型	高力黄铜 + 固体润滑剂	≥ 210	-50~+150
OFAWTZ	短头螺栓孔型	GR1(大气、油中使用)		

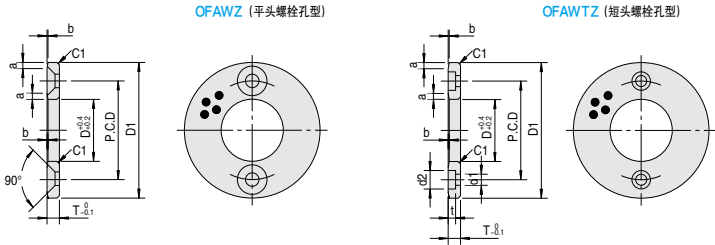

订购编号示例

1 代号 - 2 规格
OFAWZ - 20

1 代号	2 规格	T	D	D1	安装孔						倒角				
					P.C.D	数量	OFAWZ		OFAWTZ		a	b			
							平头螺栓	d1	d2	t					
OFAWZ OFAWTZ	6	3(4)	6.2	25	15	2	M3	3.5	6	2.4	1.5	0.3			
	8		8.2	28	18										
	10		10.2	30	20										
	12		12.2	40	28						2	0.4			
	13		13.2												
	15		15.2												
	16		16.2	50	35										
	18		18.2												
	20	20.2	5	55	40	2.5	0.4								
	25	25.2													
	30	30.2						60	45						
	35	35.2						70	50						
	40	7	40.2	80	60	4	M6	5.5	9	4	3	0.5			
	50	8	50.3	100	75		M8	-	-	-			3.5		
	60		60.3	120	90										
	70	10	70.3	130	100						M10		-	-	-
80	80.3		150	120	3.5										
90	90.5		170	140	3.5										
100	100.5		190	160											

△ () 内为 OFAWTZ 的尺寸。