



内径 G6 外径 m6

产品特点: 衬套和 g6 公差导向的间隙小, 与内径 F7 外径 m6 型 (OFABZ、OFABZU)、内径 E7 外径 r6 型 (OFABR、OFABL、OFABRU) 相比, 可实现高精度直线运动和旋转运动。

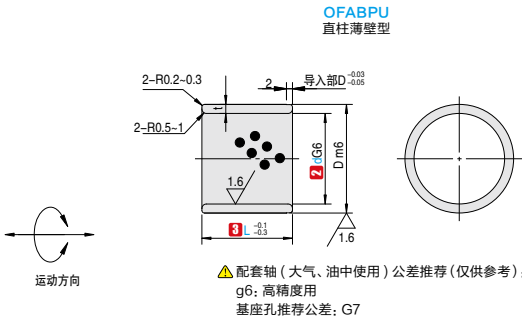

代号	类型	材质	内径公差	外径公差	硬度 HB	使用温度范围 (℃)
OFABP	直柱标准型	高力黄铜 + 固体润滑剂 GR1 (大气、油中使用)	G6	m6	≥ 210	-50~+150
OFABPU	直柱薄壁型					

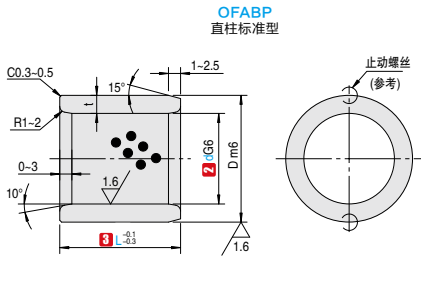

▲ 配套轴 (大气、油中使用) 公差推荐 (仅供参考):
g6: 高精度用
基座孔推荐公差: G7

订购编号示例 1 代号 - 2 d - 3 L
OFABP - 20 - 30

1 代号	2 dG6		Dm6		3 L	t	基座孔尺寸	推荐公差 G7
OFABP	5	+0.012 +0.004	9	+0.015 +0.006	8 10 12 15	2	9	+0.020 +0.005
	6		10		8 10 12 15 16		10	
	8	+0.014 +0.005	12	+0.018 +0.007	10 12 15 16 20		12	+0.024 +0.006
	10		14		10 12 15 16 20 25		14	
	12	+0.017 +0.006	18	+0.021 +0.008	12 15 16 20 25	3	18	+0.028 +0.007
	13		19		12 15 16 20 25		19	
	15		21		12 15 16 20 25		21	
	16		22		12 15 16 20 25		22	
	20	+0.020 +0.007	28	+0.025 +0.009	15 16 20 25 30	4	28	+0.034 +0.009
	25		33		16 20 25 30 40		33	
	30		38		16 20 25 30 40		38	

1 代号	2 dG6		Dm6		3 L	t	基座孔尺寸	推荐公差 G7
OFABPU	5	+0.012 +0.004	7	+0.015 +0.006	8 10 12	2	7	+0.020 +0.005
	6		8		8 10 12 15 16		8	
	8	+0.014 +0.005	10		8 10 12 15 16 20		10	
	10		12		8 10 12 15 16 20 25		12	
	12	+0.017 +0.006	15	+0.018 +0.007	10 12 15 16 20 25	3	15	+0.024 +0.006
	13		16		10 12 15 16 20 25		16	
	15		18		10 12 15 16 20 25 30		18	
	16		20		10 12 15 16 20 25 30		20	
	18	+0.020 +0.007	22	+0.021 +0.008	12 15 16 20 25 30	4	22	+0.028 +0.007
	20		24		15 16 20 25 30 40		24	
	25		29		15 16 20 25 30 40		29	
	30		34		15 16 20 25 30 40		34	
	35	+0.025 +0.009	40	+0.025 +0.009	20 25 30 40	4	40	+0.034 +0.009
	40		45		20 25 30 40 50		45	
	50		55	+0.030 +0.011	30 40 50		55	