


螺帽紧固型

产品特点：也可用作自由端同步齿形带的连接金属件。

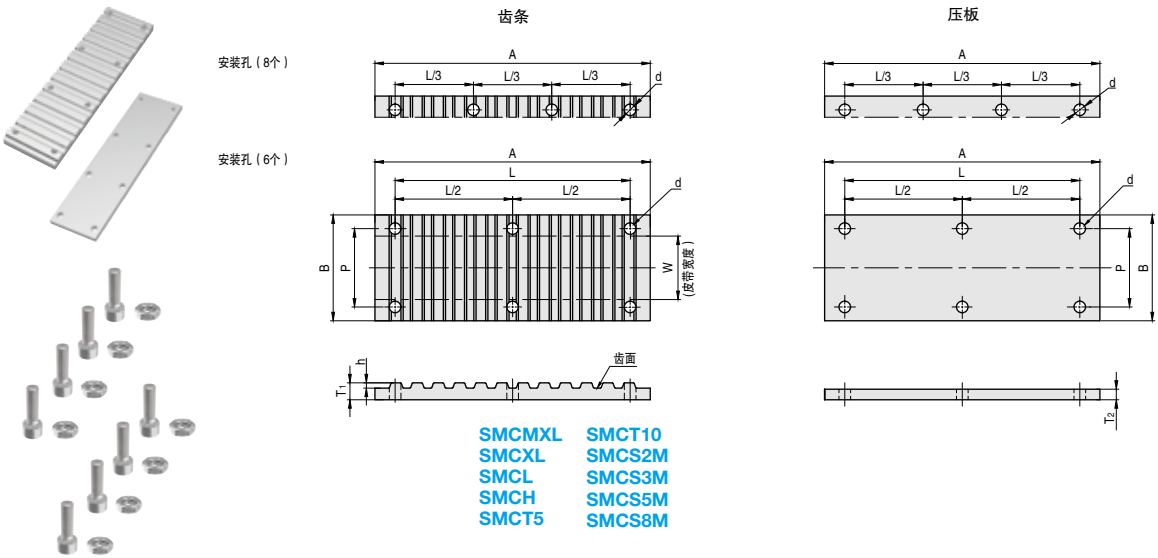

螺帽紧固型

订购编号示例												
1 代号		2 宽度代号										
SMCXL		037										

1 代号	2 宽度代号	W	A	B	T ₁	T ₂	h	L	P	d	螺栓规格	安装孔数
SMC MXL	025	6.4	26	18	4	4	0.51	19	11	3.4	M3-12	6
	037	9.5		22					14			
	050	12.7		26					18			
SMC XL	025	6.4	66	24	6	5	1.25	56	12	4.5	M4-15	8
	031	7.9		25					14			
	037	9.5		26					16			
SMC L	050	12.7	124	30	8	5	1.9	111	20	5.5	M5-20	8
	050	12.7		32					26			
	075	19.1		38					33			
SMC H	100	25.4	165	46	10	5	2.3	147	46	5.5	M5-20	8
	150	38.1		58					26			
	075	19.1		38					33			
SMC T5	100	25.4	165	46	10	5	2.3	147	45	5.5	M5-20	8
	150	38.1		58					58			
	200	50.8		70					16			
SMC T10	10	10	65	26	6	5	1.2	51	21	4.5	M4-15	6
	15	15		32					26			
	20	20		38					31			
SMC S2M	25	25	130	43	8	5	2.5	111	22	5.5	M5-20	8
	15	15		34					27			
	20	20		40					32			
SMC S3M	25	25	130	44	8	5	2.5	111	37	5.5	M5-20	8
	30	30		50					8			
	40	40		60					10			
SMC S5M	4	4	26	16	4	4	0.76	18	15	3.4	M3-12	6
	6	6		18					10			
	10	10		24					14			
SMC S8M	6	6	39	18	6	5	1.81	51	16	4.5	M4-15	8
	10	10		22					21			
	15	15		28					31			
SMC S8M	10	10	65	26	6	5	2.85	84	22	5.5	M5-20	8
	15	15		34					32			
	25	25		44					37			
SMC S8M	30	30	104	50	8	5	2.85	84	47	5.5	M5-20	8
	40	40		60					10			
	10	10		24					14			

- ▲ 齿形以橡胶同步带、聚氨酯同步带为标准
- ▲ 皮带宽度以同步带为标准
- ▲ S 口 M 型的金属件也可用于 P 口 M 型同步带
- ▲ MXL025 也可用于 MXL019 的同步带
- ▲ 请勿在同步带上开安装孔

代号	类型	材质	表面处理	附件
SMC MXL SMC XL SMC L SMC H SMC T5 SMC T10 SMC S2M SMC S3M SMC S5M SMC S8M	螺帽紧固型	铝合金	本色阳极氧化处理	内六角螺钉