


两端双轴承型

产品特点：轮两侧各有一个轴承。

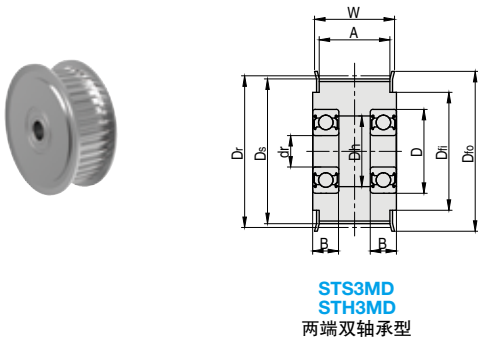

代号	类型	材质			表面处理
		主体	挡片	轴承	
STS3MD STH3MD	两端双轴承型	铝合金	铝合金	钢	本色阳极氧化处理

订购编号示例	1 代号	-	2 齿数	-	3 匹配同步带类型
	STS3MD	-	20	-	S3M-10
	STH3MD	-	20	-	H3M-10

1 代号	2 齿数	3 匹配同步带类型	主要尺寸								轴承尺寸		
			dr	Dr	Ds	Dfo	Dfi	A	W	Dh	轴承型号	D	B
STS3MD STH3MD	20	S3M-6	3	19.10	18.34	23	14	7	11	5	67/3-2Z×2	6	2.5
		S3M-10	4					11	15	6	67/4-2Z×2	7	2.5
		S3M-15	5					17	21	9	68/5-2Z×2	11	5
	24	S3M-6	5	22.92	22.16	26	18	7	11	11	69/5-2Z×2	13	4
		S3M-10						11	15				
		S3M-15						17	21				
	25	S3M-10	6	23.87	23.11	27	18	11	15	13	69/6-2Z×2	15	5
		S3M-15						17	21				
	26	S3M-10	6	24.83	24.07	28	19	11	15	13	69/6-2Z×2	15	5
		S3M-15						17	21				
	28	S3M-10	6	26.74	25.98	30	21	11	15	13	69/6-2Z×2	15	5
		S3M-15						17	21				
	30	S3M-10	6	28.65	27.89	32	23	11	15	13	69/6-2Z×2	15	5
		S3M-15						17	21				
	32	S3M-10	8	30.56	29.80	34	25	11	15	16.5	69/8-2Z×2	19	6
		S3M-15						17	21				
	36	S3M-10	10	34.38	33.62	38	29	11	15	19.5	6900-2Z×2	22	6
		S3M-15						17	21				
	40	S3M-10	10	38.20	37.44	42	33	11	15	19.5	6900-2Z×2	22	6
		S3M-15						17	21				
	44	S3M-10	10	42.02	41.25	46	36	11	15	19.5	6900-2Z×2	22	6
		S3M-15						17	21				
	48	S3M-10	10	45.84	45.07	49	40	11	15	19.5	6900-2Z×2	22	6
		S3M-15						17	21				
	50	S3M-10	10	47.75	46.98	51	42	11	15	19.5	6900-2Z×2	22	6
		S3M-15						17	21				
	60	S3M-10	10	57.30	56.53	61	52	11	15	19.5	6900-2Z×2	22	6
		S3M-15						17	21				

▲ 轴承精度等级：0 级（压入前）
▲ 轴承采用压入方式
▲ STH3MD 型号匹配同步带类型为 H3M 系列。

同步带轮